


Wireless Shutter Contact Interface 3 channels, flush-mount

Product ref.: 92068
PRODUCT FEATURES

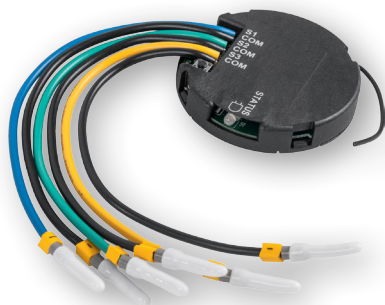

- Detects switching states of standard switches, magnetic contacts (reed contacts) or limit switches
- Change in a switching state is detected, stored and transmitted to connected Homematic components in the form of a radio command
- Configuration via Homematic Central Control Unit CCU2
- Battery life of over three years (based on a usage rate of six times per day)
- The slimline design means it can be easily installed in a flush-mounting box
- Can be installed even behind push-buttons or switches

TECHNICAL SPECIFICATIONS

Supply voltage:	1x Lithium coin cell CR2032
Battery life:	3 years (typically), based on a usage rate of 6 times per day
Degree of protection:	IP20
Dimensions (ø x H):	50 x 10 mm
Weight:	30 g (not incl. battery)
Radio frequency:	868.3 MHz
Typ. open area RF range:	200 m

LOGISTIC DATA

Product reference:	92068
EAN code:	4047976920686
Short description:	HM-SCI-3-FM
Packing unit:	144
Packaging dimensions:	122 x 93 x 36 mm
Total weight:	82.8 g

PACKAGE CONTENTS

Wireless Shutter Contact Interface 3 channels
 Operating manual in DE and EN