


Shutter Actuator – flush-mount

Product ref.: 151347A0

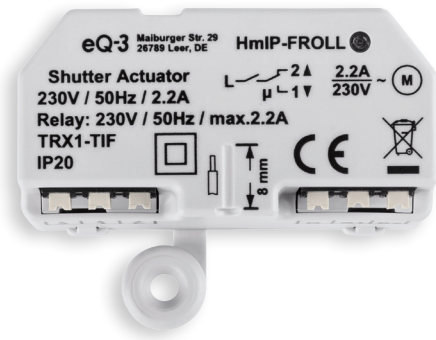

Technical specifications

| | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply voltage | 230 V/50 Hz |
| Current consumption | 2.2 A max. |
| Standby power consumption | 0.2 W |
| Max. switching capacity | 500 VA |
| Load type | motor load |
| Relay | 1x NO contact, 1x changeover contact |
| Cable type and cross section | rigid and flexible cable, 0.75-1.5 mm ² |
| Installation | only in switch boxes (device boxes) in accordance with DIN 49073-1 or surface-mounting boxes in accordance with DIN 60670-1 (e.g. Abox 025 or Abox 040) |
| Degree of protection | IP20 |
| Ambient temperature | -10 to +55 °C |
| Dimensions (W x H x D) | 54 x 33 x 41 mm |
| Weight | 40 g |
| Radio frequency band | 868.0-868.6 MHz 869.4-869.65 MHz |
| Typ. open area RF range | 180 m |

Logistical data

| | |
|------------------------|-------------------|
| Product reference | 151347A0 |
| EAN code | 4047976513475 |
| Short description | HmIP-FROLL |
| Packing unit | 90 |
| Packing dimensions | 122 x 112 x 48 mm |
| Weight incl. packaging | 121.2 g |



Product features

- Flush-mounted actuator controls shutters and awnings
- Comfortable operation via Homematic IP app and via Homematic IP Remote Control
- With individually configured week profiles, shutters/awnings can be moved up and down in a time-controlled manner
- Comfortable control dependent on sunrise and sunset
- Lock-out, storm and heat protection can be realised in combination with the Homematic IP app and additional components
- Easy to install with automatic calibration drive
- Suitable for all standard tube motors
- Supports connection of two standard push-buttons via screwless clamps for local operation
- Compact design offers easy installation in flush-mounted boxes or in surface-mounted junction boxes (e.g. ELS Spelsberg Abox 25) e.g. for operation in basements
- Easy to install thanks to screwless clamps
- A neutral conductor is required for installation
- Comfortable and individual voice control (e.g. via Amazon Alexa)
- For operation, the Homematic IP Access Point in connection with the Homematic IP app (no recurring costs), the Homematic Central Control Unit CCU2 or an appropriate partner solution is required

Package contents

Homematic IP Shutter Actuator – flush-mount

User manual