

INVISIBLE
SWITCHING OF
WIRED ACTUATORS

Wired Wall-mount Remote Control for brand switches – 2 channels


HmIPW-BRC2

The flexible wall-mount remote control for flush-mounted installation offers the ideal solution for every application in the smart home. One or more functions can be triggered simultaneously via a standard rocker switch. The device can be used to switch light sources on or off or to move shutters up and down, for example.



homematic ^{IP}
wired

Mounting plate for installation on a flush-mounted box

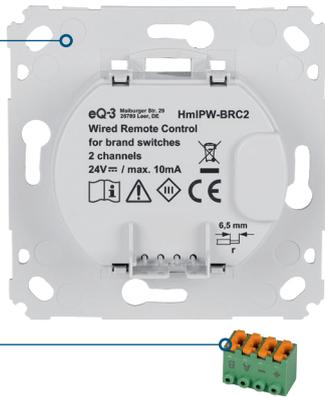

Easy connection of the wired bus via removable push-in terminal

IDEAL SOLUTION FOR EVERY APPLICATION

Two channels for comfortable control of devices or system functions in your smart home: The device can be used to switch or dim light sources on or off, activate or deactivate the eco mode or to move shutters up or down.

EASY INTEGRATION INTO EXISTING DESIGNS

Can also be integrated into existing switches by making use of existing frames and rockers. With the appropriate adapter, the device can be integrated into the most popular switch designs of leading manufacturers (an overview of compatible manufacturers is available at www.homematic-ip.com).

REMOTE CONTROL FOR FLUSH-MOUNTED INSTALLATION

After installation to a flush-mounted box and connection to the wired bus, several Homematic IP (Wired) actuators and system functions can be operated at the same time, at the touch of a button via the standard rocker switch. In this way, lights are switched off or shutters are moved down, for example.

SUITABLE FOR A LARGE NUMBER OF HOMEMATIC IP WIRED ACTUATORS




POWER SUPPLY VIA THE WIRED BUS

Connection is established via the wired bus for reliable power supply and secure communication between the devices.

FIRM HOLD ON FLUSH-MOUNTED BOXES

Optimised for easy installation on flush-mounted boxes. The removable push-in terminal with spring tension clamps offers easy connection to the wired bus.

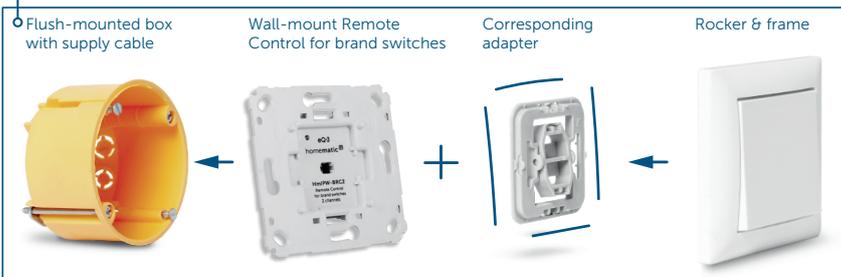

The wired system can be controlled via the free Homematic IP app, the WebUI interface of the CCU3 or via various partner solutions.

- For operation of the wired system, the Homematic IP Wired Access Point is required.

TECHNICAL SPECIFICATIONS

Supply voltage	24 VDC, +5 % -20 %, SELV
Current consumption	10 mA max.
Standby power consumption	50 mW
Installation	only in normal commercial switch boxes (device boxes) in accordance with DIN 49073-1
Cable type and cross section	rigid cable, 0.12-0.50 mm ²
Degree of protection	IP20
Ambient temperature	-5 to +40 °C
Dimensions (W x H x D)	71 x 71 x 28 mm
Weight	27 g

LOGISTICAL DATA

Product reference	154284A0
EAN code	4047976542840
Short description	HmiPW-BRC2
Packing unit	90
Packing dimensions	122 x 112 x 48 mm
Weight incl. packaging	120.1 g

PACKAGE CONTENTS

- Homematic IP Wired Wall-mount Remote Control – 2 channels
- Clip-on frame and mounting plate
- Screws (4x)
- User manual