


## Wired RS485 Dimming Actuator 1-channel, leading edge, DIN rail mount

Product ref.: 76803  
**PRODUCT FEATURES**

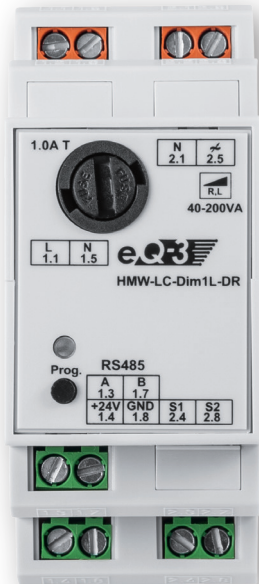

- Dimming actuator for standard DIN rail mounting in house- and sub-distribution boards
- Mounting width: 2 WM (35 mm)
- Suitable for dimming light bulbs and low-voltage halogen lamps with conventional transformers
- The phase control technology is suitable for resistive and inductive loads
- Interference-proof thanks to bus cabling
- Can carry up to 200 VA
- Easy configuration directly on the device itself or via the Homematic Central Control Unit

### TECHNICAL SPECIFICATIONS

Supply voltage:	24 VDC
Current consumption:	40 mA (max.)
Max. load:	200 VA (resistive load and inductive loads)
Degree of protection:	IP20
Ambient temperature:	0 to 35 °C
Dimensions (W x H x D):	35 x 87 x 64 mm (2 WM width)
Weight:	115 g
Communication:	RS485 bus

### LOGISTIC DATA

Product reference:	76803
EAN code:	4047976768035
Short description:	HMW-LC-Dim1L-DR
Packing unit:	90
Packaging dimensions:	122 x 112 x 48 mm
Total weight:	191.0 g

### PACKAGE CONTENTS

Homematic Wired RS485 Dimming Actuator  
 Operating manual in DE and EN