


## Wireless Dimming Actuator 1-channel, trailing edge, flush-mount

Product ref.: 91816  
**PRODUCT FEATURES**

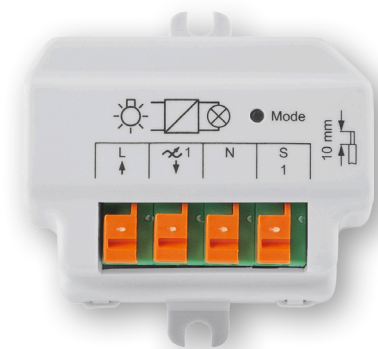

- The flush-mount dimming actuator allows dimming of incandescent lamps, HV and LV halogen lamps (with electronic transformer) and dimmable energy-saving lamps as well as dimmable LEDs
- Trailing edge dimming actuator for wireless dimming of loads
- The slimline design means it can easily be installed in a flush-mounting box
- Adjustable ramp time with soft-on/soft-off function for longer bulb life
- Adjustable time profile for individual dimming and switching of connected loads
- Configurable maximum ON time

### TECHNICAL SPECIFICATIONS

Supply voltage:	230 V/50 Hz
Minimum load:	10 VA
Minimum current:	40 mA
Max. switching capacity:	180 VA
Degree of protection:	IP20
Dimensions (W x H x D):	53 x 53 x 30 mm
Weight:	43 g
Radio frequency:	868.3 MHz
Typ. open area RF range:	200 m

### LOGISTIC DATA

Product reference:	91816
EAN code:	4047976918164
Short description:	HM-LC-Dim1T-FM
Packing unit:	90
Packaging dimensions:	122 x 112 x 48 mm
Total weight:	120.3 g

### PACKAGE CONTENTS

Wireless Dimming Actuator  
 Operating manual in DE and EN