

HIGH SWITCHING  
CAPACITY AND PRECISE  
CONSUMPTION  
METERING


# Switch actuator and meter (16 A) – flush mount

HmIP-FSM16

This particularly compact, flush-mounted switch actuator and meter gives you smart control of connected loads while also measuring their energy consumption. Thanks to its exceptionally high switching capacity, it is also suitable for use with large devices up to 16 A – without affecting the measuring accuracy.



homematic   
Smart living. Simply exciting.

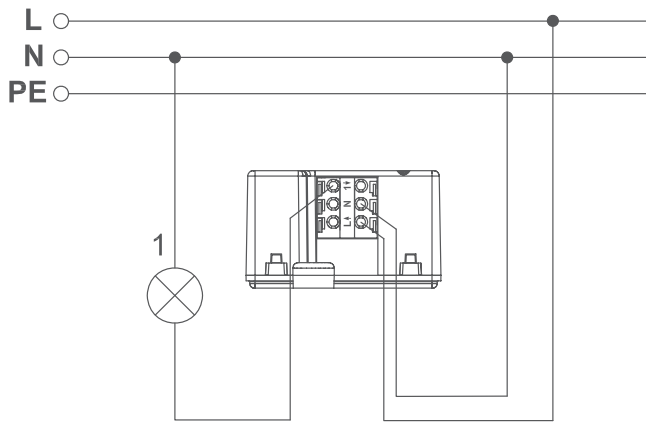

A neutral conductor is required for installation

## SWITCHING AND METERING

With a switching capacity of 3,680 W for up to 20 minutes and a continuous load of 2,760 W, the switch actuator and meter is particularly suitable for large loads up to 16 A. Its high measuring accuracy also enables precise measurement of small loads, such as stand-by consumption.

The actuator is suitable for the following loads:

- ✓ Ohmic loads (16 A/3680 W)
- ✓ Light bulbs (16 A/3680 W)

## TECHNICAL SPECIFICATIONS

Supply voltage	230 V/50 Hz
Current consumption	16 A max.
Power consumption in standby	0.2 W
Max. switching capacity	2760 W permanently 3680 W for 20 min
Load type	load, $\cos\phi \geq 0.95$
Cable type and cross section	rigid and flexible cable, 1.5–2.5 mm <sup>2</sup>
Measuring accuracy (performance)	measuring range: 0 to 3680 W resolution: 0.01 W accuracy: 1% $\pm$ 0.03 W of the measured value
Installation	in flush-mounted boxes (device boxes) according to DIN 49073-1 and in ELS Spelsberg junction boxes (e.g. Abox 25 and Abox 40)
Degree of protection	IP20
Ambient temperature	5 to 35 °C
Dimensions (W x H x D)	54 x 33 x 41 mm
Weight	49 g
Radio frequency band	868.0–868.6 MHz 869.4–869.65 MHz
Typical radio free-field range	180 m

## POWER CONSUMPTION UNDER CONTROL

With the metering function, the consumption values and costs of connected electrical appliances can be easily monitored via an app. This quickly identifies “power guzzlers” in your home and switches appliances on only when they are needed.

In addition, customised energy consumption monitoring automations can be set up in the app. For example, a push notification can be sent when the switch actuator and meter has exceeded a defined consumption value.

## INVISIBLE INSTALLATION

Compact design for easy installation in common flush-mounted boxes. The screwless terminals make wiring particularly easy and secure.

Alternatively, it is also possible to install the device in surface-mounted distribution boxes (e.g. ELS Spelsberg Abox 25) in basement rooms or in protected outdoor areas.

## FLEXIBLE OPERATION

- ✓ Wirelessly using Homematic IP push-buttons, or remote controls or motion detectors
- ✓ At any time via the Homematic IP smartphone app
- ✓ Via adjustable time profiles to automatic switch the lighting on or off at the desired time
- ✓ Automatic switching on and off at sunset and sunrise
- ✓ Easy operation via voice control (using Amazon Alexa or Google Assistant)

To enable operation, the device must be connected with one of the following solutions:

- Homematic IP Access Point with free smartphone app and free cloud service
- Third-party partner solutions

## LOGISTICS DATA

Product reference	150239A0
EAN code	4047976502394
Short description	HmIP-FSM16
Packing unit	90
Packing dimensions	122 x 112 x 48 mm
Weight incl. packaging	118.0 g

## PACKAGE CONTENTS

Homematic IP Switch Actuator and Meter (16 A) – flush-mount  
Operating manual