


SAVE ENERGY,  
INCREASE  
YOUR SECURITY

# Window / Door Contact with magnet

HmIP-SWDM


The window / door contact immediately detects opening and closing of windows and doors. Monitoring of windows secures the home while saving valuable energy during ventilation as the room temperature is reduced automatically.

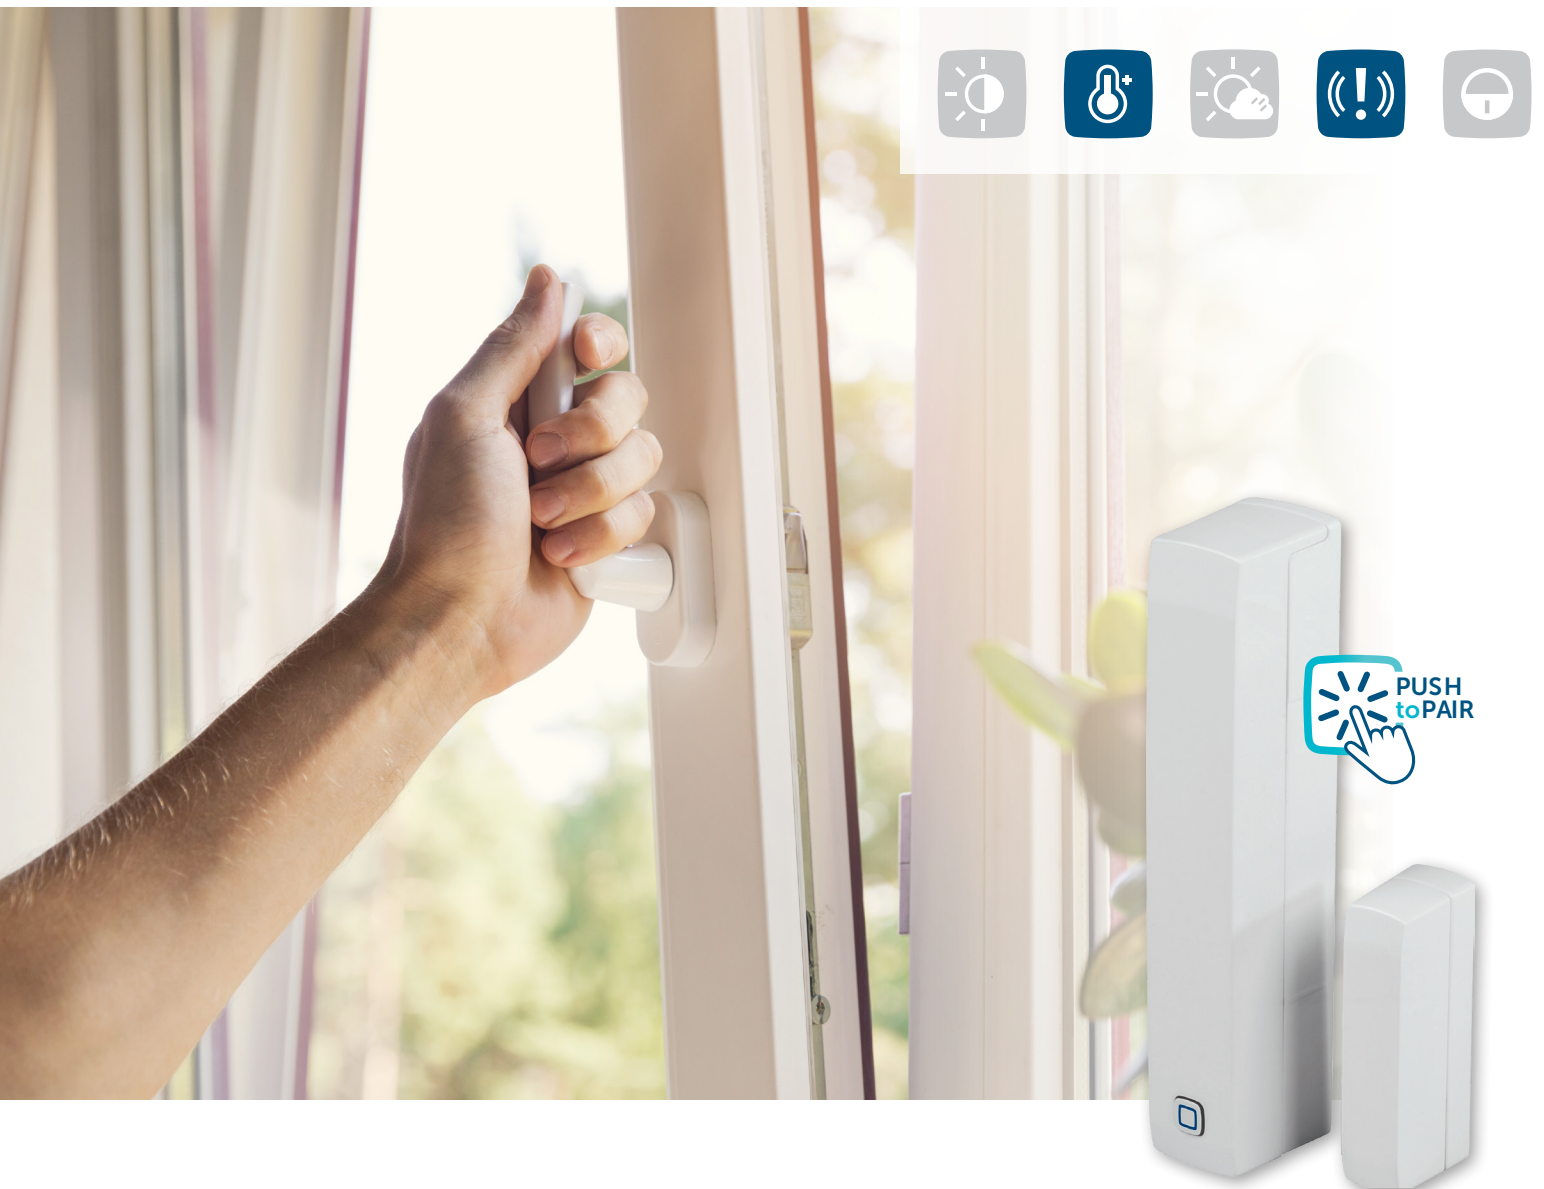

homematic <sup>IP</sup>  
Smart Living, Simply Exciting.

## SMART MONITORING FOR A SECURE HOME

Opening and closing of windows and doors is detected immediately and displayed via the Homematic IP app. In addition, your home becomes even more secure with a Homematic IP Alarm Siren (e.g. HmIP-ASIR-2): If a window or door is opened, a loud alarm sound will be triggered automatically.

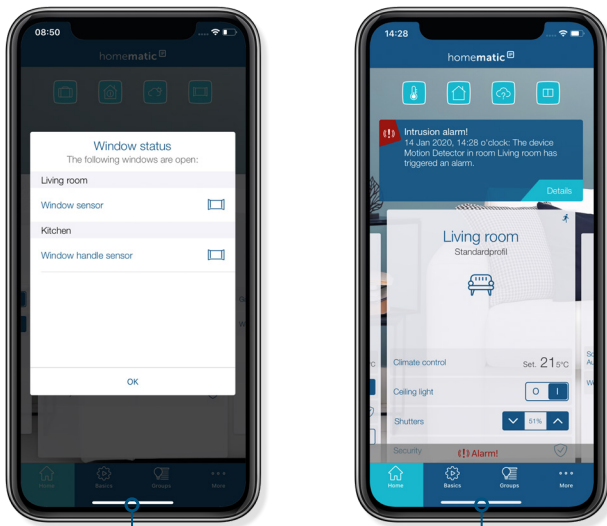

Shows open windows or doors and alarm messages in the Homematic IP app

To enable operation, the device has to be connected with one of the following solutions:

- Stand-alone (push-to-pair)
- Homematic IP Access Point with free smartphone app and free cloud service
- Central Control Unit CCU2/CCU3 with the local user interface WebUI
- Third-party solutions of partners

## FRESH AIR BUT NO WASTE OF ENERGY

In connection with the Homematic IP Radiator Thermostat, the temperature in the room is automatically reduced if windows are opened for ventilation. The lowering temperature can even be defined by the user. The individual comfort temperature is automatically set as soon as the window is closed.

## EVERYTHING IN SIGHT WHEN LEAVING THE HOUSE

The Homematic IP app gives a current overview of windows and doors in the smart home, providing for a secure feeling when you leave home or while being on the move.

## INDIVIDUAL CONFIGURATION

- ✓ Stand-alone operation (push-to-pair) with direct pairing of up to eight Homematic IP Radiator Thermostats – basic (HmIP-eTRV-B) for automatic lowering of the room temperature during ventilation.
- ✓ In combination with an Access Point, configuration and status display are carried out via the free Homematic IP smartphone app. This enables flexible combination with a variety of Homematic IP devices for enhanced functionality.

## FAST AND EASY INSTALLATION

The mounting material included in the scope of delivery allows the contact and magnet to be fixed either with screws or adhesive strips. Thanks to residue-free removal of the adhesive strip, the window contact is even suitable for rented property.

## TECHNICAL SPECIFICATIONS

Supply voltage	2x 1.5 V LR03/micro/AAA
Current consumption	35 mA max.
Battery life	4 years (typ.)
Degree of protection	IP20
Ambient temperature	-10 to +50°C
Dimensions electronic unit (W x H x D)	102 x 18 x 25 mm
Dimensions magnet contact (W x H x D)	48 x 11 x 13 mm
Weight electronic unit	46 g (including batteries)
Weight magnetic contact	17 g (including magnet)
Radio frequency band	868.0-868.6 MHz 869.4-869.65 MHz
Typ. open area RF range	200 m

## LOGISTICAL DATA

Product reference	151363A0
EAN code	4047976513635
Short description	HmIP-SWDM
Packing unit	144
Packing dimensions	122 x 93 x 36 mm
Weight incl. packaging	138.0 g

## PACKAGE CONTENTS

Homematic IP Window / Door Contact with magnet  
 Magnet contact and spacer  
 Double-sided adhesive strips (2x) and screws (4x)  
 1.5 V LR03/micro/AAA batteries (2x)  
 User manual