

**START NOW!**

**FEEL SAFE & SECURE  
IN YOUR SMART HOME**

# Starter Set Alarm

HmlIP-SK7


The easy start into smart monitoring of your home: Open windows or movements are quickly detected and immediately displayed as push notification on the smartphone. A loud alarm sound is immediately triggered via the alarm siren to chase burglars away.



**VDE**  
09/2021  
**Smart Home**  
Information security  
tested  
Homematic IP

[www.VDEinfo.com](http://www.VDEinfo.com)  
ID. 40046786

**homematic** <sup>IP</sup>  
Smart Living, Simply Exciting.

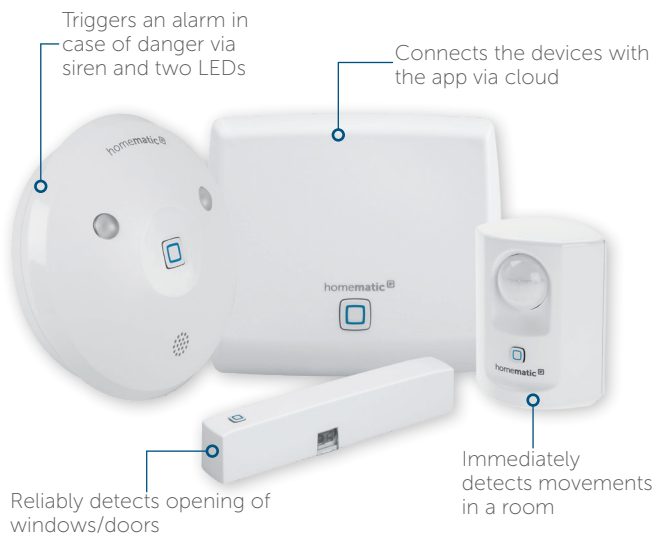

Alarm message in the Homematic IP app



## TECHNICAL SPECIFICATIONS

### Access Point:

Supply voltage	Power supply unit (5 V)
Dimensions (W x H x D)	118 x 104 x 26 mm
Typical open area RF range	400 m

### Motion detector – indoor:

Supply voltage	2x 1.5 V LR6/mignon/AA
Battery life	3 years (typ.)
Dimensions (W x H x D)	52 x 65 x 34 mm
Typical open area RF range	280 m
Detection range	12 m
Detection angle	105° horizontal/40° vertical

### Window / Door Contact – optical:

Supply voltage	1x 1.5 V LR03/micro/AAA
Battery life	2 years (typ.)
Dimensions (W x H x D)	102 x 15 x 20 mm
Typical open area RF range	300 m

### Alarm siren:

Supply voltage	3x 1.5 V LR6/mignon/AA
Battery life	2 years (typ.)
Dimensions (ø x H)	124 x 45 mm
Typical open area RF range	250 m
Volume Piezo loudspeaker:	≥ 90 dB @ a distance of 1 meter

For further technical details and information, please refer to the data sheet of the respective device.

## CREATE A SECURE HOME WITH HOMEMATIC IP

Movements as well as opening and closing of windows and doors are detected reliably and immediately displayed in the Homematic IP app. The combination with the alarm siren finally completes the starter set: In case of danger, loud alarm sounds and two bright red LED lights make sure that you are immediately warned.

## FAIL-SAFE AND RELIABLE

Alarms are triggered even without Internet or cloud connection due direct communication between the devices. Even if the Access Point is destroyed, by a burglar for example, the other devices remain active.

## EVERYTHING IN SIGHT

The Homematic IP app provides a current overview of the smart home, providing for a secure feeling when you leave home or while being on the move.

## COMFORTABLE VOICE CONTROL

In addition to operation via push-button, remote control or app, the alarm mode (absence or presence mode) can also be activated (not deactivated) via voice control with Amazon Alexa and Google Assistant.

## HIGH SECURITY AND ANONYMITY ACCORDING TO GERMAN QUALITY STANDARDS

- ✓ No personal data required
- ✓ AES 128 encryption between devices, app and cloud
- ✓ Server location in Germany
- ✓ Reliable radio protocol based on 868/869.525 MHz

## EASY ENTRY INTO THE SMART HOME WORLD

Flexible extension to a comprehensive smart home is possible at any time thanks to the large Homematic IP product range.

## LOGISTICAL DATA

Product reference	153348A0
EAN code	4047976533480
Short description	HmIP-SK7
Packing unit	6
Packing dimensions	325 x 194 x 150 mm
Weight incl. packaging	1626.5 g

## PACKAGE CONTENTS

Homematic IP Access Point (plug-in power supply unit, network cable)  
 Homematic IP Motion Detector with Brightness Sensor – indoor (with stand and wall mounting bracket)  
 Homematic IP Window / Door Contact – optical (caps in white and brown)  
 Homematic IP Alarm Siren  
 Batteries and mounting material  
 User manual